




Hangzhou Risingsun Cable Co., Ltd

Multicore Overall Screened Cables-Belden Equivalent 9538

Applications:

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for RS232 applications, used as audio, control and instrumentation cables.

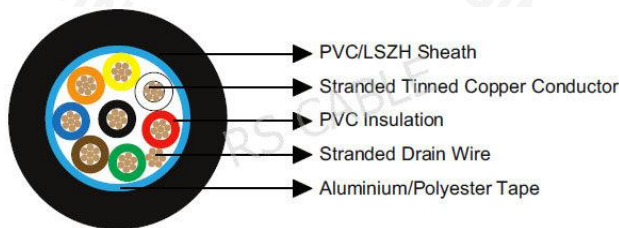

Construction:

| | |
|-------------------|--|
| Conductor | Tinned Copper Wire |
| Insulation | PVC |
| Overall Screen | Aluminum/Polyester tape |
| Drain Wire | Stranded Tinned Copper 7×0.20mm |
| Sheath | PVC(V Type)/LSZH(H type) |
| Insulation Colour | Black,White,Red,Green,Brown,Blue,Orange,yellow |

Electrical & Mechanical Characteristics:

| | |
|--|---------------------|
| AWG | 24 |
| Conductor Construction | 7×0.20mm |
| UL Style | 2464 |
| Maximum Conductor Resistance (ohm/km) | 85 |
| Voltage Rating(V) | 300 |
| Nominal Capacitance Conductor to Conductor(pF/m) | 108 |
| Nominal Capacitance Conductor to Screen(pF/m) | 213 |
| Bending Radius | 10×Overall Diameter |
| Operating Temperature(°C) | -30 to 80 |

Dimensions:

| Ordering Code | No of Cores | Insulation Thickness (mm) | Sheath Thickness (mm) | Overall Diameter (mm) |
|---------------|-------------|---------------------------|-----------------------|-----------------------|
| RS9538V | 8 | 0.25 | 0.81 | 5.7 |
| RS9538H | 8 | 0.25 | 0.81 | 5.7 |

HANGZHOU RISINGSUN CABLE CO.,LTD

Add:1188 Jinxi Rd.s Linglong Industrial Zone Lin'an,Zhejiang,China

Tel: 86-571-63766698 Fax:86-571-63766808

Web:www.rscable.com