




# Hangzhou Risingsun Cable Co., Ltd

## Multicore Overall Screened Cables-Belden Equivalent 8729

### Applications:

These multicore overall screened cables have individually insulated cores laid up in an aluminum/polyester tape with a tinned copper drain wire. These cables are suitable for used as audio, control and instrumentation cables

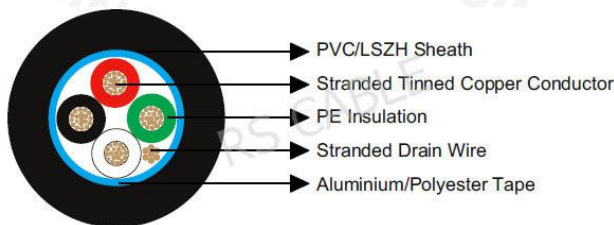

### Construction:

Conductor	Tinned Copper Wire
Insulation	PE
Overall Screen	Aluminum/Polyester tape
Drain Wire	Stranded Tinned Copper
Sheath	PVC(V Type)/LSZH(H type)
Insulation Colour	Black,Red,Green,Clear

### Electrical & Mechanical Characteristics:

AWG	22
Conductor Construction	19×0.16mm
UL Style	2094
Maximum Conductor Resistance (ohm/km)	54.8
Voltage Rating(V)	300
Nominal Capacitance Conductor to Conductor(pF/m)	72
Nominal Capacitance Conductor to Screen(pF/m)	138
Bending Radius	10×Overall Diameter
Operating Temperature(°C)	-40 to 75

### Dimensions:

Ordering Code	No of Cores	Insulation Thickness (mm)	Sheath Thickness (mm)	Overall Diameter (mm)
RS8729V	4	0.41	1.30	6.5
RS8729H	4	0.41	1.30	6.5

### HANGZHOU RISINGSUN CABLE CO.,LTD

Add:1188 Jinxi Rd.s Linglong Industrial Zone Lin'an,Zhejiang,China

Tel: 86-571-63766698 Fax:86-571-63766808

Web:www.rscable.com