




Hangzhou Risingsun Cable Co., Ltd

Multicore Overall Screened Cables-Belden Equivalent 9261

Applications:

These multicore overall screened cables have individually insulated cores laid up in a tinned copper braid screen, suitable for used as communication and instrumentation cables.

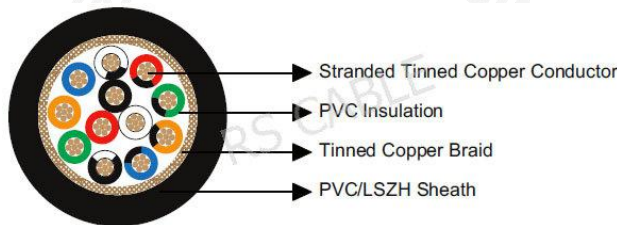

Construction:

Conductor	Tinned Copper Wire
Insulation	PVC
Overall Screen	Tinned Copper Braid,85% coverage
Sheath	PVC(V Type)/LSZH(H type)
Insulation Colour	Black, White, Red, Green, Orange, Blue, White/Black, Red/Black, Green/Black, Orange/Black, Blue/Black, Black/White.

Electrical & Mechanical Characteristics:

AWG	20
Conductor Construction	7×0.32mm
UL Style	2464
Maximum Conductor Resistance (ohm/km)	34.1
Voltage Rating(V)	300
Nominal Capacitance Conductor to Conductor(pF/m)	85
Nominal Capacitance Conductor to Screen(pF/m)	187
Bending Radius	10×Overall Diameter
Operating Temperature(°C)	-20 to 80

Dimensions:

Ordering Code	No of Cores	Insulation Thickness (mm)	Sheath Thickness (mm)	Overall Diameter (mm)
RS9261V	12	0.41	1.02	10.1
RS9261H	12	0.41	1.02	10.1

HANGZHOU RISINGSUN CABLE CO.,LTD

Add:1188 Jinxi Rd.s Linglong Industrial Zone Lin'an,Zhejiang,China

Tel: 86-571-63766698 Fax:86-571-63766808

Web:www.rscable.com